

ARX 110

ARTICULATED TANDEM ROLLER

EU Stage IIIA / U.S. EPA Tier 3



ENABLING FOCUS AND PRODUCTIVITY

The Ammann ARX 110 EU Stage IIIA / U.S. EPA Tier 3 Tandem Roller provides comfort that helps the operator stay focused throughout the shift and ultimately helps your jobsite productivity. Compaction output is high and the system is efficient. Each drum has an independent vibratory pump. The roller also features a heavy-duty, two-stage vibrator and easy adjustment of amplitude and frequency. A differential lock is standard, while the optional ACE^{force} system provides a host of benefits including measurement and documentation, evaluation of material stiffness, operator guidance and documentation.

PRODUCTIVITY

Multiple vibratory frequencies

Varied vibratory settings adjust compaction output for even more precise compaction control and higher quality

Advanced articulation joint

Permanent contact with the surface and a wide range of working widths maximises productivity

Machine customisation

Options make the machine a perfect match for diverse jobsites and varying customer needs

ERGONOMICS

Multi-functional display

The central display is located in front of the operator for optimal machine control and monitoring

Intelligent functions

Integrated advanced functions make machine more operator friendly, intuitive and safe

Operator station

An intuitively organized, fully adjustable operator station has all controls located within easy reach

SERVICEABILITY

Accessible engine compartment

Tool-free, wide-opening side doors on the engine compartment

Easy-to-reach maintenance points

All service points are conveniently located for easy access

Self-diagnostic system

The on-board, automated diagnostic system quickly identifies potential problems

APPLICATIONS


- Medium and large compaction sites
- Transport construction
- Municipal and town roads
- Motorways
- Airport runways
- Housing developments
- Industrial zones
- City centers

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

	Sand / Gravel	Mixed Soils	Silt	Clay	Stabilisation	Asphalt
ARX 110	0.42 m (17 in)	0.32 m (13 in)	-	-	0.22 m (9 in)	0.15 m (6 in)

AMMANN

TECHNICAL SPECIFICATIONS
ARX 110 ARTICULATED TANDEM ROLLER
EU Stage IIIA / U.S. EPA Tier 3

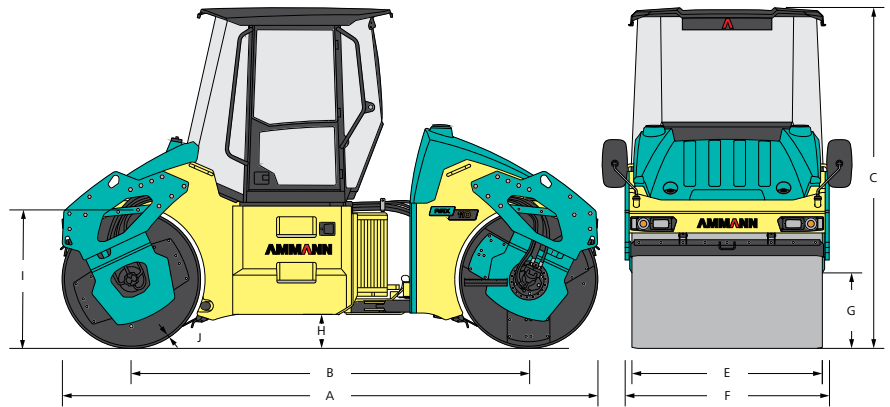

DIMENSIONS		
A	Machine length	4720 mm (185.8 in)
B	Wheelbase	3500 mm (137.8 in)
C	Machine height	3000 mm (118.2 in)
E	Drum width	1680 mm (66.1 in)
F	Machine width	1800 mm (70.9 in)
G	Side clearance	780 mm (30.7 in)
H	Ground clearance	300 mm (11.8 in)
I	Drum diameter	1220 mm (48.0 in)
J	Drum shell thickness	22 mm (0.9 in)

WEIGHT & OPERATING CHARACTERISTICS			
	ARX 110	ARX 110 HF	
Operating weight	10 310 kg (22 730 lb)	10 310 kg (22 730 lb)	
Operating weight max.	11 750 kg (25 900 lb)	11 750 kg (25 900 lb)	
Stat. lin. load of front drum	30.7 kg/cm (171.9 lb/in)	30.7 kg/cm (171.9 lb/in)	
Stat. lin. load of rear drum	30.7 kg/cm (171.9 lb/in)	30.7 kg/cm (171.9 lb/in)	
Max. transport speed	10.5 km/h (6.5 MPH)	10.5 km/h (6.5 MPH)	
Gradeability with / without vibr.	25 % / 30 %	25 % / 30 %	
Turning radius inner (edge)	5470 mm (215.4 in)	5470 mm (215.4 in)	
Drum offset	170 mm (6.7 in)	170 mm (6.7 in)	

ENGINE	
Manufacturer	Deutz TCD3.6 L4
Power output ISO 14396	74.4 kW (100 HP)
Maximum torque	410/1600 Nm (ft lb)/rpm
Emmission class	EU Stage IIIA / U.S. EPA Tier 3
Exhaust gas after-treatment	EGR

STANDARD EQUIPMENT

- CE conformity
- ROPS/FOPS Open platform with Plastic roof
- ATC - Ammann Traction Control
- Pressure water sprinkling with interval switch, 3 stage filtration and 2 pumps
- Lockable articulation joint with Oscillation and Offset (Crab mode)
- Foldable scrapers
- 2 amplitudes / Multiple frequencies
- Operator's station with one drive lever (RH)
- 170° Slideable, rotatable and horizontally adjustable driver's seat with armrests
- Multi-functional display for machine control and overview
- Adjustable Steering column
- Road lights (headlights, rearlights, turning signals, brake lights)
- Telematics Ready
- On-Board diagnostics
- Centralized draining points

COMPACTION FORCES		
	ARX 110	ARX 110 HF
Frequency I	38–42 Hz (2280–2520 VPM)	42–46 Hz (2520–2760 VPM)
Frequency II	43–52 Hz (2580–3120 VPM)	58–67 Hz (3480–4020 VPM)
Amplitude I	0.7 mm (0.028 in)	0.62 mm (0.024 in)
Amplitude II	0.34 mm (0.013 in)	0.23 mm (0.009 in)
Centrifugal force I	54–78kN (12 140–17 535 lbf)	61–82kN (13 713–18 434 lbf)
Centrifugal force II	98–120kN (22 031–26 977 lbf)	88–105kN (19 783–23 605 lbf)
Oscillation frequency	40 Hz (2400 VPM)	40 Hz (2400 VPM)
Oscillation amplitude	1.3 mm (0.051 in)	1.3 mm (0.051 in)
Oscillation force	77kN (17 310 lbf)	77kN (17 310 lbf)

MISCELLANEOUS	
Brakes operating	Hydrostatic
Brakes parking	Mechanical multiple-disc
Brakes emergency	Mechanical multiple-disc
Fuel tank capacity	220 l (58.1 gal)
Water tank capacity	840 l (222 gal)
Voltage	24 V

OPTIONAL EQUIPMENT

- Cab with ROPS/FOPS
- Air condition
- Additional Lights 360° LED
- Warning beacon
- Double drum roller
 - Unsplitted drums with HF
- Double drum roller
 - Oscillating rear drum (unsplitted)
- Double drum roller
 - Unsplitted with Oscillating rear drum
- Infrared thermometer
- Compaction Measuring System ACE^{force}
- Chip Spreader Ammann
- Edge cutter
- Rear view camera
- Telematics System ServiceLink (3 Years)
- GPS Q-Compaction
- Backup alarm
- Bio-degradable hydraulic oil
- Customer color
- Sun Films on glasses